



机甲重工机械

JINING JIJIA MACHINERY CO.,LTD



WhatsApp



WeChat

☎ 0086 15163757685

✉ ej0511028@gmail.com

🌐 cnjjmachinery.com



JIJIA HEAVY INDUSTRY MACHINERY



产品画册

PRODUCT CATALOG

济宁机甲重工机械有限公司/Jining Jijia Machinery Co.,Ltd

主营产品：挖掘机、滑移装载机、割草机、叉车、翻斗车、两头忙...

Main Products : Construction Machinery, Mining Machinery...

COMPANY PROFILE

公司简介

本公司成立于2022年，主要生产挖掘机、装载机、割草机、反铲装载机、滑移装载机、叉车及拖拉机等设备。

公司占地面积逾20000平方米，拥有100名员工保障日常运营。

年净出口额约达2800万美元，其中40%主要来自北美国家。工厂同时为全球经销商及制造商提供OEM/ODM代工服务。客户可通过阿里巴巴、谷歌、脸书、YouTube及独立官网等平台选购产品。

所有机械零件均由本厂自主生产或从全球知名品牌进口。专业售后团队全年提供24小时视频/电话支持。

期待与全球客户携手，共创便捷商机！

About us

Our company was founded in 2022, mainly producing excavator, loader, mower, backhoe loader, skid steer loader, forklift and tractor etc.

Our company operates on more than 20000 square with 100 employees supporting our daily tasks.

Our net exporting value is estimated at around 28 million USD per year, around 40 percent is mainly from North American countries. Our factory also supports OEM/ODM orders for distributors or factories all over the world. Customers could find our products through all platforms like Alibaba, Google, Facebook, Youtube and Independent website.

Our machinery parts are all made from our factory or imported from well known brands from all over the world. Our professional after-sales team offers 24/7 videocall or phone call support all year round.

Hopping to make all over world easy-business with our customers!



cnjjmachinery.com



jnjjzgix.m.en.alibaba.com

CORPORATE CULTURE

企业文化



企业使命/CORPORATE MISSION

以可靠的机械技术与诚信的服务，成为客户首选的全球合作伙伴。

Through reliable mechanical technology and trustworthy service, we have become our customers' preferred global partner.



企业愿景/CORPORATE VISION

通过专业的解决方案，为客户的卓越运营创造价值。

Delivering value for our clients' operational excellence through professional solutions.



企业价值观/CORPORATE VALUES

客户至上，诚信担当，专业高效。

Customer-centric, integrity-driven, professional and efficient.

CONTENTS

目录

Company Profile/公司简介01

Corporate Culture/企业文化02

EXCAVATOR/挖掘机

JJ08 Mini Excavator/JJ08 小型挖掘机.....05

JJ12 Mini Excavator/JJ12 小型挖掘机06

JJ15 Mini Excavator/JJ15 小型挖掘机07

JJ15E Electric Excavator/JJ15E 电动挖掘机.....08

JJ18 Mini Excavator/JJ18 小型挖掘机.....09

JJ20 Mini Excavator/JJ20 小型挖掘机.....10

JJ25 Mini Excavator/JJ25 小型挖掘机.....11

JJ30 Mini Excavator/JJ30 小型挖掘机12

JJ30P Mini Excavator/JJ30P 小型挖掘机13

SKID STEER LOADER/滑移装载机

JJ380 Skid Steer Loader/JJ380 滑移装载机.....15

JJ390 Skid Steer Loader/JJ390 滑移装载机16

JJ390T Skid Steer Loader/JJ390T 滑移装载机.....17

JJ390W Skid Steer Loader/JJ390W 滑移装载机18

JJ490W Skid Steer Loader/JJ490W 滑移装载机19

JJ904B Electric Loader/JJ904B 电动装载机.....20

JJ904Z Electric Loader/JJ904Z 电动装载机.....21

JJ904X Diesel-powered/JJ904X 柴油装载机22

JJ906B Electric Loader/JJ906B 电动装载机23


JJ906Z Diesel-powered/JJ906Z 柴油装载机.....24

ELECTRIC FORKLIFT/电动叉车

JJEC08 Electric forklift/JJEC08 电动叉车.....25

JJEC15 Electric forklift/JJEC15 电动叉车.....26

JJEC20 Electric forklift/JJEC20 电动叉车.....27

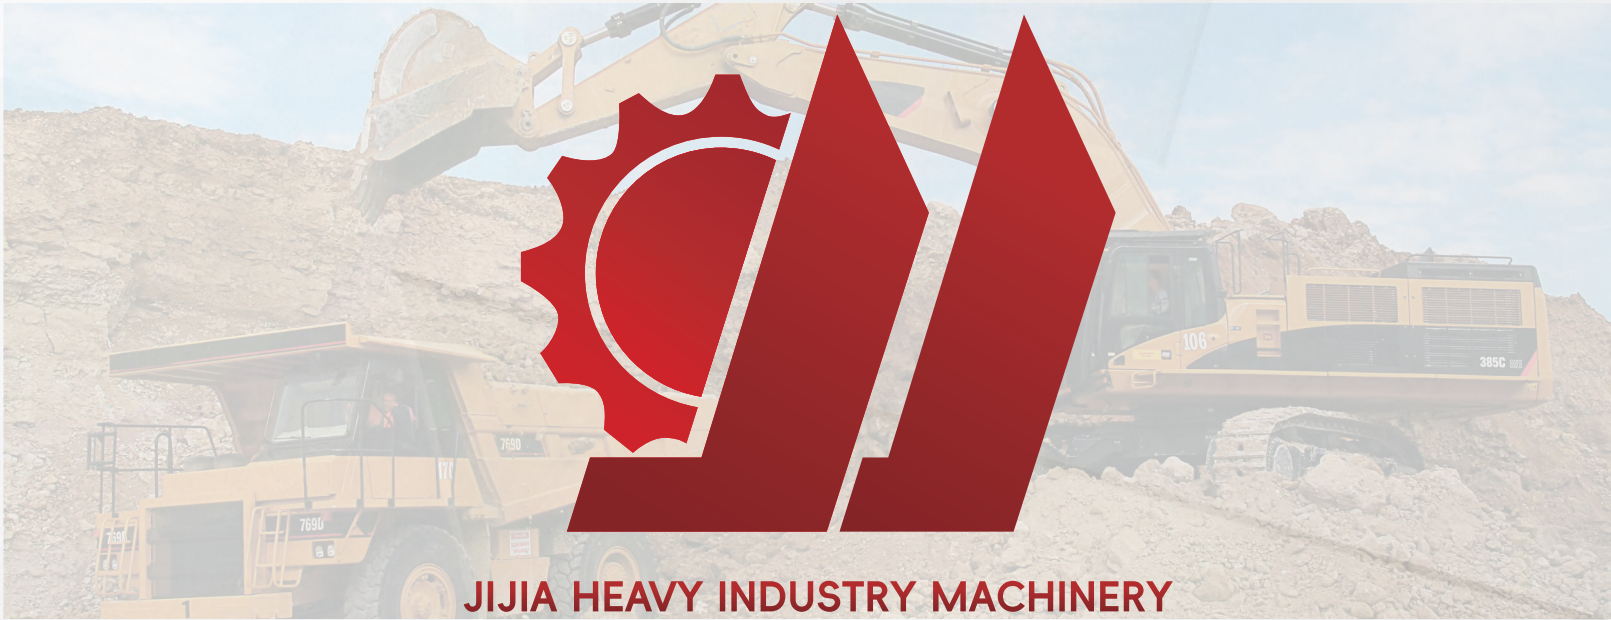

JIJIA HEAVY INDUSTRY MACHINERY

JJ08 Mini Excavator

JJ08小型挖掘机

Engine optional/发动机可选配: Koop/科普, Changchai/常柴, Briggs & Stratton/百力通
Optional configurations/配置可选: large arm side swing/大臂侧摆, Rear guard/后护板



JJ08 Mini Excavator/JJ08小型挖掘机			
Bucket capacity 铲斗容量	0.020m³	Engine 发动机	Koop192F/Changchai192F 科普192F/常柴192F
Chassis width 底盘宽度	720mm	Excavator bucket lift height 挖掘机铲斗提升高度	120mm
Track width 履带宽度	150mm	Blade Support Height 铲斗支撑高度	185mm
Track length 履带长度	1140mm	Excavator bucket width 挖掘机铲斗宽度	300mm
Minimum ground clearance 最小离地间隙	80mm	Rotational speed 旋转速度	12r/min
Maximum excavation height 最大挖掘高度	2450mm	Maximum climbing ability 最大爬坡能力	30°
Maximum unloading height 最大卸料高度	1600mm	Ground contact pressure 接地压力	19kgf/cm²
Maximum excavation radius 最大挖掘半径	2450mm	Hydraulic pump 液压泵	Single Gear Pump 单级齿轮泵
Maximum excavation depth 最大挖掘深度	1300mm	Work pressure 工作压力	14MPa
Vertical excavation depth 垂直挖掘深度	1200mm	Power 功率	7.6KW/12Hp
Minimum Turning Radius 最小转弯半径	1100mm	Overall weight 总重量	730kg

JJ12 Mini Excavator

JJ12小型挖掘机

Engine optional/发动机可选: Koop 192 (Euro 5)/科普192(欧五), Changchai 192/常柴192,Briggs&Stratton 25T2/百力通25T2;
Optional configurations: four legged shed, driver's cab, large arm side swing, chassis extension and retraction
配置可选:四腿棚、驾驶室、大臂侧摆、底盘伸缩



JJ12 Mini Excavator/JJ12小型挖掘机			
Engine type 发动机型号	KOOP 192F	Overall machine size 整机尺寸	2870*1000*2030mm
Power types 动力种类	Single-cylinder, four-stroke, air-cooled, vertical 单缸、四冲程、风冷、立式	Trace ground length 履带接地长度	1200mm
		Trace width 履带宽度	180mm
Displacement 排量	0.499L	Max maximum depth 挖掘最大深度	1700mm
Rated power 额定功率	7.6KW/3000rpm	Unload maximum height 卸载最大高度	1745mm
Horsepower 马力	10.3HP	Excav maximum height 挖掘最大高度	2580mm
Fuel types 燃油种类	柴油Dieseloil	Climbing capacity 爬坡能力	30°
Fuel consumption 油耗	275g/kwh	Walking speed 行走速度	0-2.5km/h
Fuel Fuel Capacity 燃油容量	5.5L	Bucket excavation force 铲斗挖掘力	11.5kn
Oil capacity 机油容量	1.65L		

JJ15 Mini Excavator

JJ15小型挖掘机

Engine optional/发动机可选配: Koop/科普, Changchai/常柴, Briggs&Stratton/百力通,Kubota/久保田,Yanmar/雅马哈,Laidong/莱动
Optional configurations: Telescoping, side swing, cab, pilot mode(mechanical, hydraulic),air conditioner, welded fuel tank, radiator,etc.
配置可选:伸缩式, 侧摆式, 驾驶室, 驾驶模式(机械式/液压式), 空调, 接式油箱, 散热器等。



JJ15 Mini Excavator/JJ15小型挖掘机			
Working weight 工作重量	1050mm	Transportation length 运输长度	2200mm
Bucket capacity 铲斗容量	0.025m³	Transportation width 运输宽度	1000mm
Travel Speed Low/High 行走速度 (低/高)	0-2.0km/h	Transportation height incl roof 运输高度 (含车顶)	2210mm
Climbing capacity 爬坡能力	35%	Ground clearance of upper disk 上盘离地间隙	380mm
Ground Specific Pressure 单位地面压力	32Kpa	Bucket width 铲斗宽度	400mm
Maximum digging radius 最大挖掘半径	2850mm	Bulldozer width 推土机宽度	1000mm
Maximum digging depth 最大挖掘深度	1650mm	Engine Brands 发动机品牌	B & S
Maximum digging height 最大挖掘高度	2610mm	Engine Model 发动机型号	XR2100
Maximum unloading height 最大卸料高度	1850mm	Maximum Horsepower 最大马力	13.5HP

JJ15E Electric Excavator

JJ15E电动挖掘机

Optional configurations: Telescoping boom, side swing, cab, air conditioner, plastic shell multi-way valve guard, welded fuel tank, hard pipe, radiator, external counter weight, etc.
配置可选:伸缩式、侧摆式、驾驶室、空调、塑料外壳多路阀护罩、焊接油箱、硬管、散热器、外部配重等




JJ15E Electric Excavator/JJ15E电动挖掘机			
Engine type 发动机型号	KOOP 192F	Overall machine size 整机尺寸	2870*1000*2030mm
Power types 动力种类	Single-cylinder, four-stroke, air-cooled, vertical 单缸、四冲程、风冷、立式	Trace ground length 履带接地长度	1200mm
		Trace width 履带宽度	180mm
Displacement 排量	0.499L	Max maximum depth 挖掘最大深度	1700mm
Rated power 额定功率	7.6KW/3000rpm	Unload maximum height 卸载最大高度	1745mm
Horsepower 马力	10.3HP	Excav maximum height 挖掘最大高度	2580mm
Fuel types 燃油种类	Diesel oil柴油	Climbing capacity 爬坡能力	30°
Fuel consumption 油耗	275g/kwh	Walking speed 行走速度	0-2.5km/h
Fuel Fuel Capacity 燃油容量	5.5L	Bucket excavation force 铲斗挖掘力	11.5kn
Oil capacity 机油容量	1.65L		

JJ18 Mini Excavator

JJ18小型挖掘机

Optional configurations/配置可选: driver's cab/驾驶室, large arm side swing/大臂侧摆, chassis extension and retraction/底盘伸缩

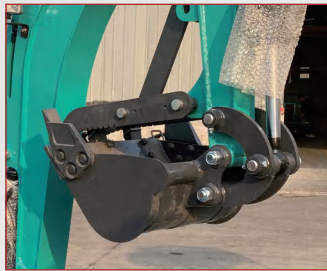

JJ18 Mini Excavator/JJ18小型挖掘机			
Engine type 发动机型号	Kubota D722	Overall machine size 整机尺寸	3250*1100*2300mm
Power types 动力种类	Vertical, water-cooled, four-stroke 立式、水冷、四冲程	Trace ground length 履带接地长度	1300mm
		Trace width 履带宽度	230mm
Displacement 排量	0.719L	Max maximum depth 挖掘最大深度	2200mm
Rated power 最大功率	14.9kw/3600rpm	Unload maximum height 卸载最大高度	2300mm
Horsepower 马力	20.3hp	Excavmaximum height 挖掘最大高度	3200mm
Fuel types 燃油种类	Diesel oil柴油	Climbing capacity 爬坡能力	32°
Fuel consumption 机油容量	5g/kwh	Walking speed 行走速度	0-3km/h
Fuel Fuel Capacity 操作重量	1800kg	Bucket excavation force 铲斗挖掘力	18kn
Oil capacity 铲斗容量	0.05m³		

JJ20 Mini Excavator

JJ20小型挖掘机

Engine optional/发动机可选配: Changchai/常柴,Kubota/久保田,Yanmar/雅马哈,Laidong/莱动

Optional configurations: Telescoping, side swing, cab, pilot mode(mechanical,hydraulic),air conditioner, radiator, etc.

配置可选:伸缩式, 侧摆式, 驾驶室, 驾驶模式(机械式, 液压式), 空调, 散热器等



JJ20 Mini Excavator/JJ20小型挖掘机			
Fuel type 燃料类型	Diesel/柴油	Rated set pressure 额定设定压力	22Mpa
Fuel grade 燃料等级	0#	Traveling hydraulic motor type 行走液压马达型号	LTM02PAK
Theoretical gas mileage 理论燃油效率	0.993L/h	Traveling hydraulic motor brand 行走液压马达品牌	Lck
Main pump type/model 主泵类型/型号	Plunger pump/柱塞泵 TFA10V028L	Rotary Hydraulic Motor Type 旋转液压马达型号	Eaton2.5K
		O-Rubber O型橡胶 (bandwidth*pitch*number of sections) (带宽*节距*段数)	230*48*70
Main pump brand 主泵品牌	Taifeng/泰丰	Counterweight 配重装置	Casting/铸造
Rated working pressure 额定工作压力	250bar	Forms of tensioning 张紧形式	Lubricate the tensioner 黄油张紧
Rated working flow 额定工作流量	64.4L/min	Hydraulic oil tank 液压油箱	13.7/21.5L
Multi-port valve 多路阀	9Load sensitive		

JJ25 Mini Excavator

JJ25小型挖掘机

Engine optional/发动机可选配: Koop/科普, Changchai/常柴, Briggs&Stratton/百力通,Yanmar/雅马哈,Laidong/莱动
Optional configurations/配置可选: Chassis extension/底盘伸缩, Side swing/侧摆



JJ15 Mini Excavator/JJ15小型挖掘机			
Engine Brand 发动机品牌	Kubota	Operating Weight 整机工作重量	1750kg
Engine Model 发动机型号	D902/E4B-CBH-1	Bucket Capacity 铲斗容量	0.054m³
Emission Standard 排放标准	CE Euro 5/EPA	Travel Speed (Low/High) 行走速度 低/高速	0-1.8km/h
Maximum Power 最大功率	11.8KW	Gradeability 爬坡能力	25°
Overall Length 总长	3400mm	Maximum Digging Height 最大挖掘高度	2750mm
Overall Width 总宽	1320mm	Maximum Dumping Height 最大卸载高度	2008mm
Overall Height 总高	2380mm	Maximum Digging Depth 最大挖掘深度	1980mm
Dozer Blade Width/Height 推土铲宽/高	1300/220mm	Maximum Digging Radius 最大挖掘半径	3640mm
		Optional: Side Swing Angle (Left/Right) 选配侧摆角度(左/右)	Right右/30°

JJ30 Mini Excavator

JJ30小型挖掘机

Engine optional/发动机可选配: Changchai 390/常柴390, Kubota D902/久保田d902,Laidong 385/莱动385
Optional configurations/配置可选: Retractable roof/顶棚, telescopic chassis/底盘伸缩, high/low speed/高低速, built-in motor/内置马达



JJ30 Mini Excavator/JJ30小型挖掘机			
Engine type 发动机型号	Kubota D1105	Overall machine size 整机尺寸	4000*1300*2300mm
Power types 动力种类	Vertical, water-cooled, four-stroke 立式, 水冷, 四冲程	Trace ground length 履带接地长度	1700mm
		Trace width 履带宽度	230mm
Displacement 排量	1.12L	Max maximum depth 挖掘最大深度	2350mm
Rated power 最大功率	21.7KW/3600rpm	Unload maximum height 卸载最大高度	2700mm
Horsepower 马力	29.5HP	Excav maximum height 挖掘最大高度	3200mm
Fuel types 燃油种类	Diesel oil柴油	Side swing angle 侧摆角度	92°
Fuel consumption 机油容量	5.1g/kwh	Walking speed 行走速度	0-5km/h
Fuel Fuel Capacity 操作重量	2500kg	Bucket excavation force 铲斗挖掘力	20kn
Oil capacity 铲斗容量	0.053m³		

JJ30P Mini Excavator

JJ30P小型挖掘机

Engine optional/发动机可选配: Kubota/久保田,Yanmar/雅马哈, Changchai/常柴, Laidong/莱动

Optional configurations: Telescoping, side swing, pilot mode(mechanical,hydraulic),air conditioner, radiator, etc.

配置可选:伸缩式, 侧摆式, 驾驶模式(机械式, 液压式), 空调, 散热器等。



JJ30P Mini Excavator/JJ30P小型挖掘机			
Working weight 工作重量	2750kg	Vehicle length 车辆长度	3850mm
Bucket capacity 铲斗容量	0.075m³	Vehicle width 车辆宽度	1500mm
Travel Speed Low/High 行走速度(低/高)	2.6-4.5km/h	At the traffic light 到交通信号灯	2500mm
Climbing capacity 爬坡能力	30%	Bulldozer width/height 推土机宽度/高度	1500/315mm
Maximum digging height 最大挖掘高度	3980mm	Engine 发动机	YANMAR 3TNV88F
Maximum unloading height 最大卸料高度	2660mm	Maximum power 最大功率	20.4kw
Maximum digging depth 最大挖掘深度	2500mm	Maximum speed 最高时速	2200rpm
Maximum digging radius 最大挖掘半径	4230mm	Number of cylinders 气缸数	3
Lateral offset (left/right) 侧移(左/右)	345/510mm	Cooling method 冷却方式	Water-cooling/水冷
Fuel grade 燃油等级	0#	Engine oil change 发动机机油更换	2.8-6.7L

One machine, multiple uses; simple and quick attachment changes.

一机多用, 随时快速更换配件属具。



JJ380 Skid Steer Loader

JJ380滑移装载机

Engine optional: RATO R420, Briggs&stratton 3864, Briggs&stratton 25T2, koop 192 (National II), koop 192 (Euro V)
发动机可选配: 润通R420、百力通3864、百力通25T2、科普192(国二)、科普192(欧五)
Optional configurations: wheeled, triangular track, three pumps and three valves, four-wheel drive
配置可选: 轮式、三角履带式、三泵三阀、四轮驱动



JJ380 Skid Steer Loader/JJ380滑移装载机			
Engine model 发动机型号	RATO R740	Overall dimensions 整机尺寸	2285*1100*1270mm
Power type 动力种类	Single-cylinder, four-stroke, air-cooled, vertical 单缸、四冲程、风冷、立式	Overall weight 整机重量	890kg
		Rated load 额定载荷	200kg
Displacement 排量	739cc	Maximum load 最大载荷	375kg
Maximum power 最大功率	16.8kw/3600rpm	Maximum unloading height 卸载最大高度	1880mm
Horsepower 马力	24hp	Hydraulic 液压	17Mpa
Fuel type 燃油种类	diesel汽油	Climbing ability 爬坡能力	30°
Fuel consumption 油耗	370g/kwh	Walking speed 行走速度	0-6km/h
Fuel capacity 燃油容量	25L	Bucket capacity 铲斗容量	0.15m³
Oil capacity 机油容量	1.6L		

JJ390 Skid Steer Loader

JJ390滑移装载机

Powerful and with simple operation for ease of mind.



JJ390 Skid Steer Loader/JJ390滑移装载机			
Engine brand 发动机品牌	RATO-R420D	Maximum operating height 最大作业高度	2580mm
Rated power 额定功率	15HP	To the height of the bucket 至铲斗高度	1940mm
Rated load 额定载荷	200kg	Vehicle height 车辆高度	1950mm
Bucket volume 铲斗容积	0.12m³	Total length without bucket 无铲斗总长度	1770mm
Driving speed 行走速度	0-6km/h	Total length with standard 带标准铲斗总长度	2415mm
Work system pressure 工作系统压力	17bar	Unloading height 卸料高度	1435mm
Fuel tank capacity 燃油箱容量	5L	Unloading distance 卸料距离	605mm
Operating quality 作业质量	900kg	Wheelbase 轴距	1155mm
Track specifications 履带规格	1800*720*450mm	Ground clearance 离地间隙	220mm
Bucket width 铲斗宽度	1000mm	Vehicle width 车辆宽度	958mm

JJ390T Skid Steer Loader

JJ390T滑移装载机



JJ390W Wheeled Skid Steer Loader

JJ390W轮式滑移装载机



JJ390T Skid Steer Loader/JJ390T滑移装载机			
Engine brand 发动机品牌	RATO-R420D	Maximum operating height 最大作业高度	2580mm
Rated power 额定功率	15HP	To the height of the bucket 至铲斗高度	1940mm
Rated load 额定载荷	200kg	Vehicle height 车辆高度	1950mm
Bucket volume 铲斗容积	0.12m³	Total length without bucket 无铲斗总长度	1770mm
Driving speed 行走速度	0-6km/h	Total length with standard 带标准铲斗总长度	2415mm
Work system pressure 工作系统压力	17bar	Unloading height 卸料高度	1435mm
Fuel tank capacity 燃油箱容量	5L	Unloading distance 卸料距离	605mm
Operating quality 作业质量	900kg	Wheelbase 轴距	1155mm
Track specifications 履带规格	1800*720*450mm	Ground clearance 离地间隙	220mm
Bucket width 铲斗宽度	1000mm	Vehicle width 车辆宽度	958mm

JJ390W Wheeled Skid Steer Loader/JJ390W轮式滑移装载机			
Engine brand 发动机品牌	RATO-R420D	Maximum Operating Height 最大作业高度	2560mm
Rated power 额定功率	15HP	Height to Bucket 斗底高度	1910mm
Rated load 额定载荷	200kg	Vehicle Height 车辆高度	1920mm
Bucket volume 铲斗容积	0.12m³	Overall Length without Bucket 无斗总长	1770mm
Driving speed 行走速度	0-6km/h	Overall Length with Standard Bucket 带标准斗总长	2415mm
Work system pressure 工作系统压力	17bar	Dumping Height 卸料高度	1415mm
Fuel tank capacity 燃油箱容量	5L	Dumping Distance 卸料距离	585mm
Operating quality 作业质量	900kg	Wheelbase 轴距	775mm
Tire Specification 轮胎规格	23*8.5-12	Ground Clearance 离地间隙	200mm
Bucket width 铲斗宽度	1000mm	Vehicle Width 车辆宽度	1005mm

JJ490W

Wheeled Skid Steer Loader

JJ490W轮式滑移装载机



JJ904B

Electric Loader

JJ904B电动装载机



Material loading
材料转载



Goods handling
货物搬运



JJ490W Wheeled Skid Steer Loader/JJ490W轮式滑移装载机			
Engine brand 发动机品牌	RATO-R670D	Maximum Operating Height 最大作业高度	2560mm
Rated power 额定功率	25HP	Height to Bucket Pin 至铲斗销轴高度	1910mm
Rated load 额定载荷	200kg	Vehicle Height 车辆高度	1920mm
Bucket volume 铲斗容积	0.12m³	Overall Length without Bucket 不带铲斗总长度	2020mm
Traveling Speed 行走速度	0-6km/h	Overall Length with Standard Bucket 带标准铲斗总长度	2660mm
Fuel Tank Capacity 燃油箱容量	18L	Dumping Distance 卸料距离	585mm
Operating Mass 操作质量	900kg	Wheelbase 轴距	925mm
Tire Specification 轮胎规格	23*8.5-12	Ground Clearance 离地间隙	200mm
Bucket width 铲斗宽度	1000mm	Vehicle Width 车辆宽度	1110mm

JJ904B Electric Loader/JJ904B电动装载机			
Weight 重量	650kg	Traveling Motor 行走马达	2500W
Oil Pump Motor 油泵电机	2000W	Unloading Height 卸料高度	1600-2300mm
Boom Thickness 动臂厚度	14mm	Bucket Capacity 铲斗容量	0.2m³
Bucket Width 铲斗宽度	1000mm	Lifting Height 提升高度	2300-3000mm
Axle 车轴	Semi - floating -Mechanical Brake 半浮动式机械制动器	Tire 轮胎	500-12
		Track Width 履带宽度	900mm
Wheelbase 轴距	1400mm	Rated Load 额定载荷	400kg
Overall Dimension 整体尺寸	3000*1050*1400mm		

JJ904Z Electric Loader


JJ904Z电动装载机



Construction site
施工现场



Site clearance
场地清理

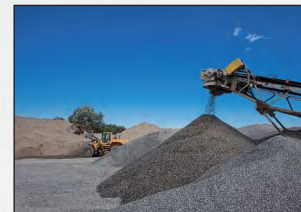

Material loading
材料转载



Goods handling
货物搬运

JJ904X Diesel-powered Loader

JJ904X柴油装载机



Urban construction
城市建筑



Agricultural field
农业领域



Landscape construction
景观建设



Accurate production
精准生产



Solid hydraulics
强劲液压



Reliable engine
可靠发动机



JJ904Z Electric Loader/JJ904Z电动装载机			
Weight 重量	700kg	Traveling Motor 行走马达	3000W
Oil Pump Motor 油泵电机	2500W	Unloading Height 卸料高度	1900-2300mm
Boom Thickness 动臂厚度	14mm	Bucket Capacity 铲斗容量	0.2m³
Bucket Width 铲斗宽度	1000mm	Lifting Height 提升高度	2600-3000mm
Axle 车轴	Semi - floating -Mechanical Brake 半浮动式机械制动器	Tire 轮胎	23*8.5-12
		Track Width 履带宽度	920mm
Wheelbase 轴距	1400mm	Rated Load 额定载荷	500kg
Overall Dimension 整体尺寸	3100*1200*1450mm		

JJ904X Diesel-powered Loader/JJ904X柴油装载机			
Weight 重量	700kg	Traveling Motor 行走马达	3000W
Oil Pump Motor 油泵电机	2500W	Unloading Height 卸料高度	1900-2300mm
Boom Thickness 动臂厚度	14mm	Bucket Capacity 铲斗容量	0.2m³
Bucket Width 铲斗宽度	1000mm	Lifting Height 提升高度	2600-3000mm
Axle 车轴	Semi - floating -Mechanical Brake 半浮动式机械制动器	Tire 轮胎	23*8.5-12
		Track Width 履带宽度	920mm
Wheelbase 轴距	1400mm	Rated Load 额定载荷	500kg
Overall Dimension 整体尺寸	3100*1200*1450mm		

JJ906B Electric Loader

JJ906B电动装载机



JJ906B Electric Loader/JJ906B电动装载机			
Weight 重量	800kg	Standard Configuration 标准配置	25HP
Oil Pump Motor 油泵电机	25~32HP	Unloading Height 卸料高度	1600-2300mm
Boom Thickness 动臂厚度	14mm	Bucket Capacity 铲斗容量	0.25m³
Bucket Width 铲斗宽度	1000-1200mm	Lifting Height 提升高度	2300-3000mm
Axle 车轴	Semi - floating -Mechanical Brake 半浮动式机械制动器	Tire 轮胎	23*8.5-12
		Track Width 履带宽度	950mm
Wheelbase 轴距	1550mm	Rated Load 额定载荷	700kg
Overall Dimension 整体尺寸	3100*1200*1500mm		

JJ906Z Diesel-powered Loader

JJ906Z柴油装载机



JJ906Z Diesel-powered Loader/JJ906Z柴油装载机			
Weight 重量	820kg	Standard Configuration 标准配置	25HP
Oil Pump Motor 油泵电机	25~32HP	Unloading Height 卸料高度	2200mm
Boom Thickness 动臂厚度	16mm	Bucket Capacity 铲斗容量	0.3m³
Bucket Width 铲斗宽度	1000-1200mm	Lifting Height 提升高度	2900mm
Axle 车轴	Semi - floating -Mechanical Brake 半浮动式机械制动器	Tire 轮胎	23*8.5-12
		Track Width 履带宽度	960mm
Wheelbase 轴距	1680mm	Rated Load 额定载荷	800kg
Overall Dimension 整体尺寸	3500*1200*1500mm		

JJEC08 Electric Forklift

JJEC08电动叉车



JJEC08 Electric Forklift/JJEC08电动叉车			
Maximum lifting weight 最大起升重量	800kg	Battery 电池	Luma batteries (48V/52A) 4块Luma电池 (48V/52A)
Drive axle 驱动轴	Integrated steel tube axle 整体钢管车轴	Charging time 充电时间	6- 8 h
Length (without fork) 长度 (不含货叉)	1600mm	Continuous working time 连续工作时间	About 4- 6 h
Length(with fork) 长度 (含货叉)	2520mm	Climbing height 爬坡高度	12°
Width 宽度	900mm	Braking method 制动方式	Handbrake / Mechanical 手刹/机械式
Height 高度	1700mm	Lifting cylinder 提升缸	High-precision processed two-way single 高精度加工双向单体
Vehicle weight 车辆重量	850kg	Fork length 叉长	920mm integrated forged fork 920mm整体锻造前叉
Lifting height 起升高度	2000mm	Hydraulic lifting motor 液压提升马达	800w power unit 800w动力单元
Turning radius 转弯半径	1500mm	Gantry frame material 门架框架材质	100mm C-shaped steel gantry frame 100mmC型钢门架车架
Travelling motor 行走电机	1500W brushless motor 1500瓦无刷电机	Body material 车身材质	Thickened integrated body 加厚一体式车身
Controller 控制器	24-tube 48V/60V 24管48V/60V universal 通用型		Thickened integrated body 加厚一体式车身
		Steering method 转向方式	Mechanical steering 机械转向系统

JJEC15 Electric Forklift

JJEC15电动叉车



JJEC15 Electric Forklift/JJEC15电动叉车			
Maximum lifting weight 最大起升重量	1500kg	Hydraulic lifting motor 液压升降马达	2200W brushless motor 2200W无刷电机
Length (without fork) 长度 (不含货叉)	2150mm	Gantry frame material 门架框架材质	120mm special section steel gantry frame 120mm特殊截面钢制龙门框架
Length (with fork) 长度 (含货叉)	3220mm		
Width 宽度	1200mm	Steering method 转向方式	Hydraulic power steering 液压动力转向
Height 高度	2150mm	Turning radius 转弯半径	2000mm
Vehicle weight 车辆重量	2100kg	Charging time 充电时间	6 -8 h
Lifting height 起升高度	3000mm	Continuous working time 连续工作时间	4 h
Body material 车身材质	Thickened one -piecestamped body 加厚一体冲压车身	Climbing height 爬升高度	12°
Traveling motor 行走电机	3000W brushless	Hydraulic lifting motor 液压升降马达	800W
	Ac motor 3000W无刷交流电机	Gantry frame material 门架框架材质	100mm C-shaped steel gantry frame 100mmC型钢龙门框架
Voltage 电压	60V	Body material 车身材质	Thickened integrated body 加厚一体式车身
Controller 控制器	Fuzhou Xinlianda 福州新联达	Steering method 转向方式	Mechanical steering 机械转向

JJEC20 Electric Forklift

JJEC20电动叉车



OUR ADVANTAGES/我们的优势:

Energy-efficient and environmentally friendly, enhanced operational efficiency, precise and smooth handling, forklift-specific C-shaped steel, solid wear-resistant tyres, long-lasting batteries, premium after-sales service, bespoke solutions tailored to your requirements.
节能环保，提升作业效率，精准顺畅操控，叉车专用C型钢结构，实心耐磨轮胎，长效电池，优质售后服务，量身定制解决方案。



Electric drive
电动驱动



Long-lasting
endurance
持久耐用



Supports
customisation
支持定制



Agile steering
转向灵活



Energy-efficient
operation
节能高效



High load-bearing
capacity
承重力强



JJEC20 Electric Forklift/JJEC20电动叉车			
Maximum lifting weight 最大起升重量	2000kg	Drive axle 驱动轴	Fully suspended cast steel integrated 220 axle 全悬挂铸钢一体式220轴
Length (without fork) 长度 (不含货叉)	2300mm	Braking method 制动方式	Handbrake braking/oil brake 手刹制动/油压制动
Length (with fork) 长度 (含货叉)	3520mm		
Width 宽度	1180mm	Lifting cylinder 举升缸	High-precision processed aviation grinding 高精度加工航空级磨削工艺
Height 高度	2100mm	Fork length 叉臂长度	1220-forged fork 1220锻造前叉
Vehicle weight 车辆重量	2700kg	Hydraulic lifting motor 液压举升马达	3000W brushless Ac oil pump motor 3000W无刷交流油泵电机
Lifting height 起升高度	3000mm	Gantry frame material 门架框架材质	120mm special section steel gantry frame 120mm特殊截面钢制龙门车架
Body material 车身材质	Thickened one -piecestamped body 加厚一体冲压车身	Steering method 转向方式	Hydraulic power steering 液压动力转向系统
Traveling motor 行走电机	4000w brushless AC motor 4000W无刷交流电机	Turning radius 转弯半径	2000mm
Voltage 电压	60V	Charging time 充电时间	6- 8 hours
Controller 控制器	Fuzhou Xinlianda 福州新联达	Continuous working time 连续工作时间	About 4 hours 约4小时
Climbing height 爬坡高度	12°		